


ACG HF Multi ISO Compact Plug & Play Module

RDHC-0202N0-02 / RDHC-0203N0-02

The ACG HF Multi ISO Compact Plug & Play Module is a contact less proximity read/write device that supports various ISO14443A/B, ISO 15693, ISO 18000-3, NFC and EPC RFID-devices, including the whole mifare® family. The module has a built in antenna. By using the serial interface the device can be connected to a PC or any other host system easily. An integrated SAM Socket enables a state of the art security level. This RFID read/write unit is optimized for maximum data throughput rates on both, the air interface as well as the serial interface. The built in boot-loader enables firmware field upgrades via the serial interface.

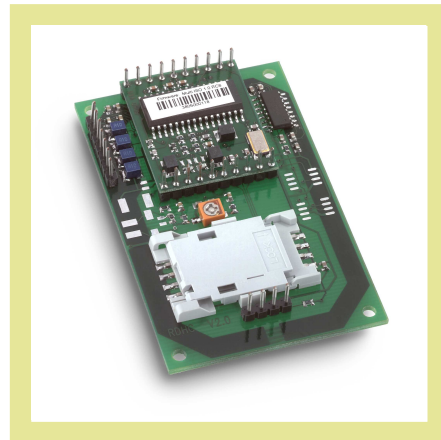

Typical Applications

- e-Payment
- e-Toll Road Pricing
- e-Ticketing for Events & Public Transport
- Access Control
- PC Access
- Authentication
- Logistics & Supply Chain Management
- Printer / Production Equipment

Technical Data

Part Number	RDHC-0202N0-02	RDHC-0203N0-02
RF Transmit Frequency	13.56MHz	
Supported Standards	ISO14443A, ISO14443B, ISO 15693, ISO 18000-3, NFC enabled, ICODE	
Supported Tag-ICs	mifare® Standard mifare® 4k mifare® Pro mifare® Ultralight mifare® DESFIRE mifare® SmartMX I-CODE SLI (SL2 ICS 20) I-CODE EPC (SL2 ICS 10) I-CODE UID (SL2 ICS 11) I-CODE NFC (Reader To Tag Mode)	SLE 55Rxx SRF55VxxP +S SLE 66CL160S SLE 66CLX320P SR176 SRIX4K LRI 64 LRI 512 EM4135 KSW Temp Sens®
		Tag-it™ HF-I Standard Tag-it™ HF-I Pro Jewel Tag Sharp B ASK GTML ASK GTML2ISO TOSMART P032/P064 ISO14443A Tags ISO14443B Tags ISO15693 Tags
Host Communication	Point-to-Point	
Communications Interface	RS232	RS422 / RS485
Communications Protocol	Specific ASCII (not for RS485) or Binary Protocol	
Communications Parameter	9600 Bit/s to 115 kBit/s, 8,N,1	
Firmware Boot-Loader	Supported Via Serial Interface	
S/W Driver	Virtual COM port Driver, API - DLL (VC++)	
Power Supply	5V DC ± 10% regulated	
Current Consumption	150mA < 10mA at power down mode	
Reading distance	Up to 75mm / 2.95 Inch, depending on tag	
RF Transmission Speed	Up to 848 kBit/s	
Antenna	Integrated	
Input/Output Connector	2 status indicator LED lines, 1 I/O Port, SAM Socket	
Size	(LxWxH) 70.0x45.0x12.1mm ± 1.0mm / 2.76x1.77x0.48 Inch ± 0.04 Inch	
Weight	17g ± 10% / 0.04 lb± 10%	
Operating Temperature	-20°C to + 80°C / -4F to +176F	
Storage Temperature	-40°C to + 85°C / -40F to +185F	
Firmware Version	1.0	
MTBF	200.000 h	
Approvals	ETS 300-330, CE, FCC part 15, RoHS Compliant	

For more information, please contact the sales office nearest you or visit our website: www.acg-id.com

ACG Identification Technologies GmbH reserves the right to change its services and products at any time without prior notice. ACG provides customer assistance in various technical areas, but does not have full access to data concerning the uses and applications of customer products. Therefore, ACG assumes no responsibility for customer product designs or for infringement of patents and/or the rights of third parties, which may result from assistance provided by ACG.

ACG Identification Technologies GmbH Am Klängenweg 6a D - 65396 Walluf
 Tel.: +49 (0) 61 23 / 791 - 0 Fax: +49 (0) 61 23 / 791 - 199

Document # 1508-DTS-02-0-03

RFID@acg-id.com www.acg-id.com

Subject to technical modifications 05/06

ACG® is a registered trademark of ACG Identification Technologies GmbH. All other trademarks referred herein belong to their respective companies.
 © ACG Identification Technologies GmbH 2006